


2

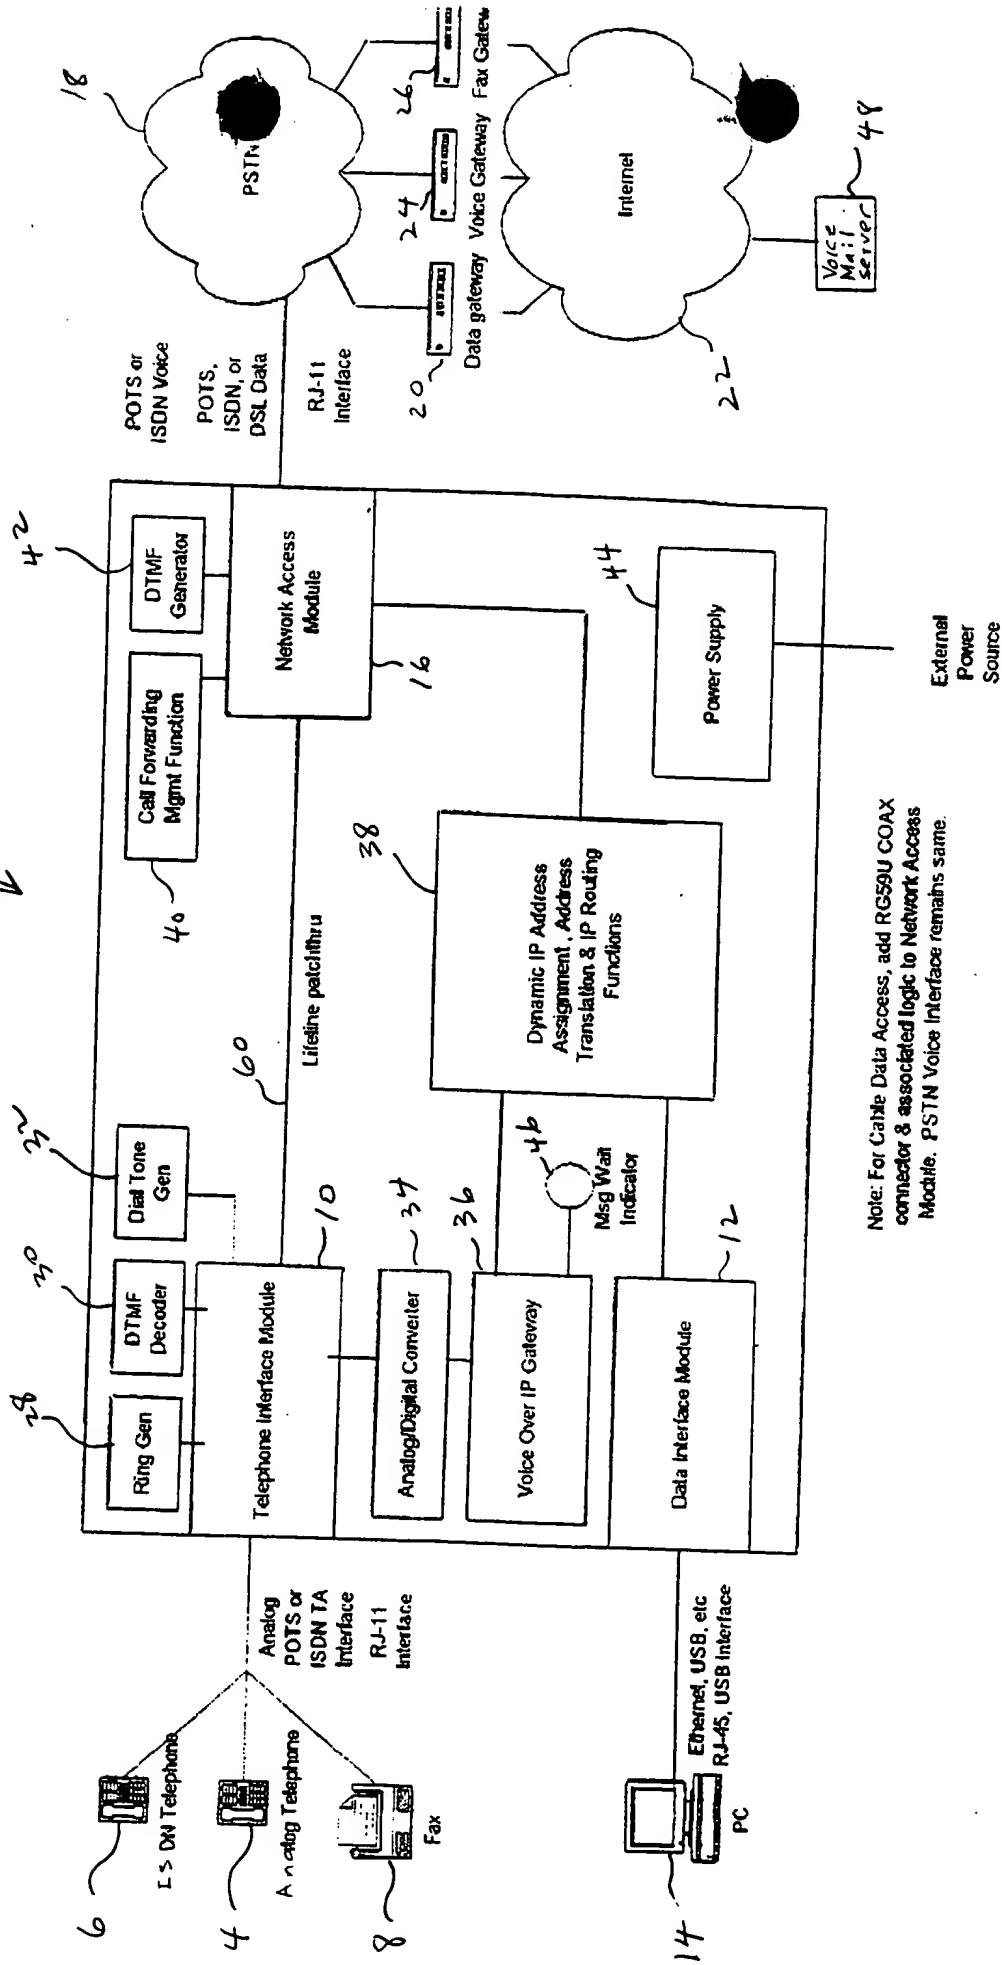

Note: For Cable Data Access, add RG59U COAX connector & associated logic to Network Access Module. PSTN Voice Interface remains same.

FIGURE 1

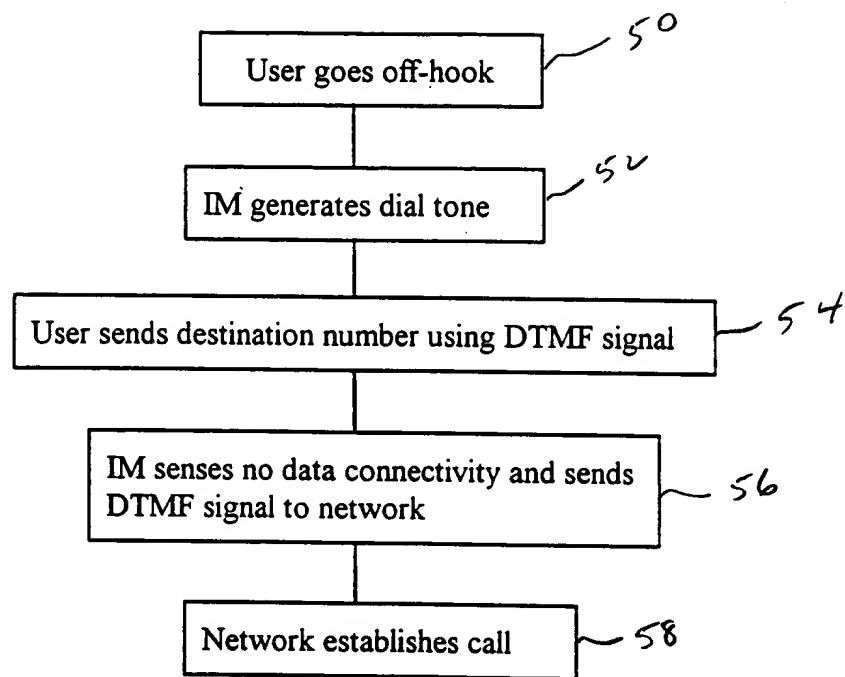


FIGURE 2

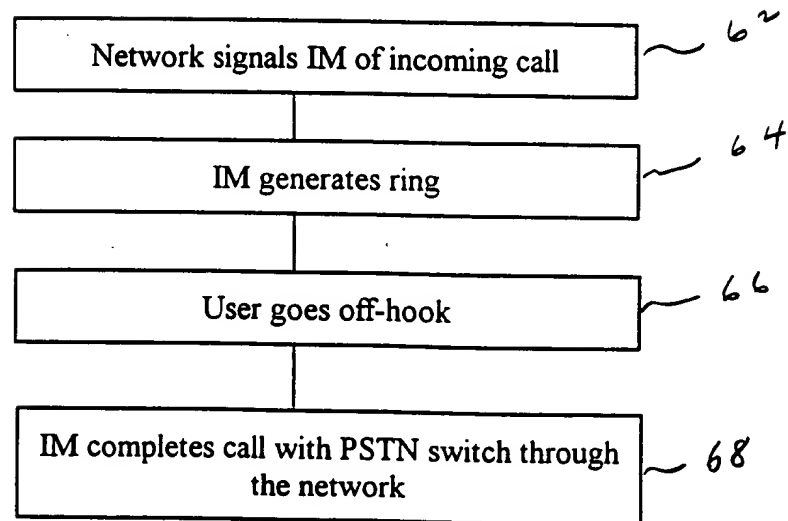


FIGURE 3

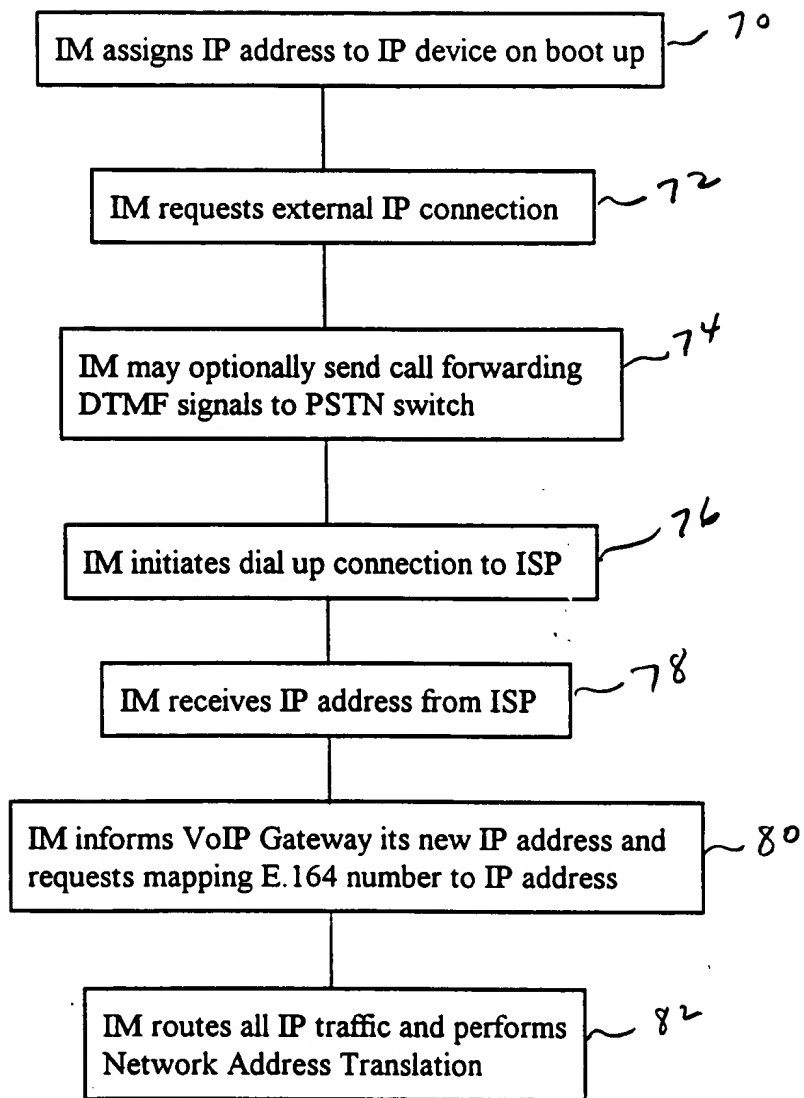


FIGURE 4

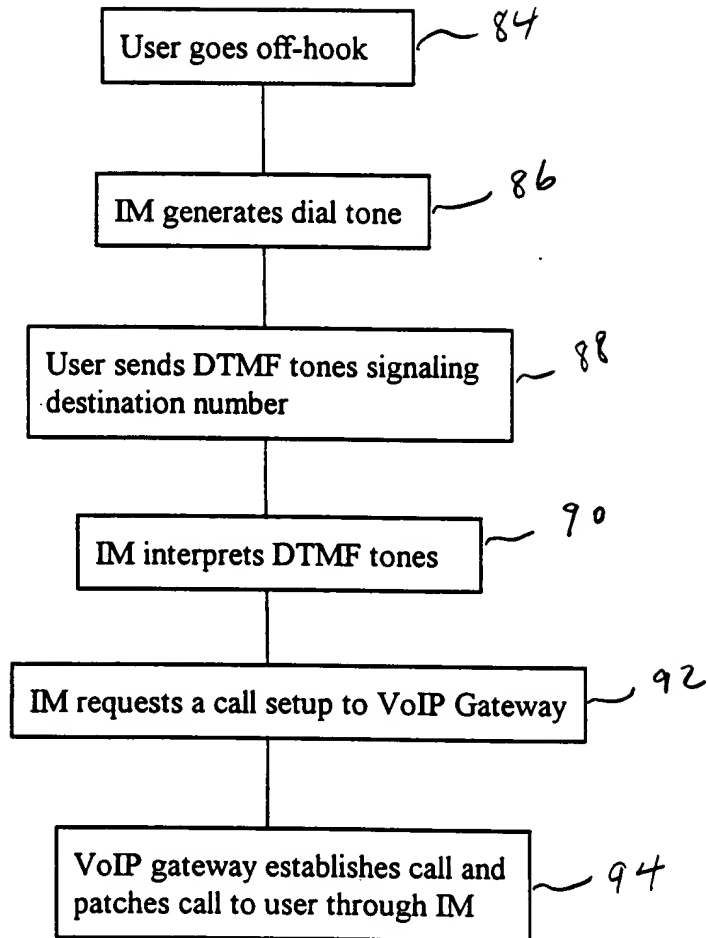


FIGURE 5

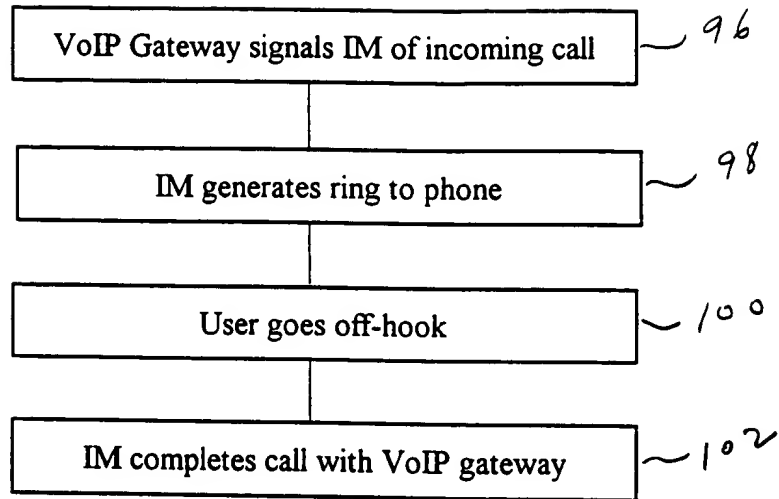


FIGURE 6

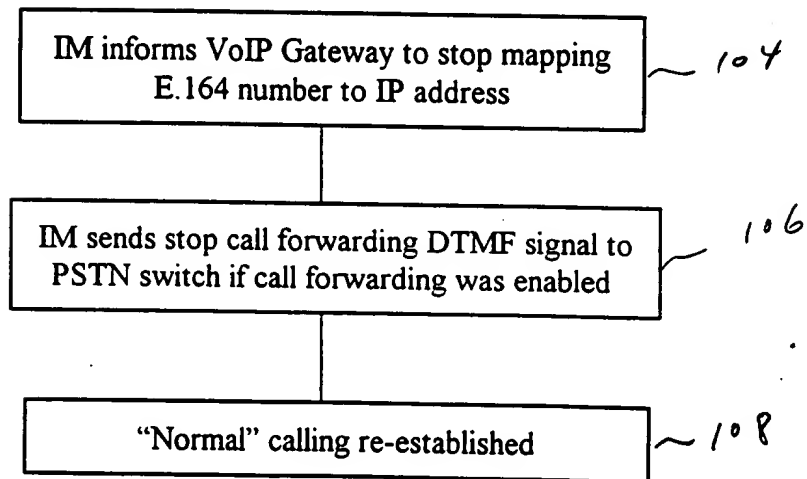


FIGURE 7